

# MotionCam Outdoor

**MotionCam Outdoor** is a wireless motion detector for outdoor use with an in-built photo camera. Photos are taken only in case of motion alarm. MotionCam Outdoor provides users and security companies with fast and protected visual verification of alarms.



The Ajax hub is required for operation  
Find the list of compatible hubs on the official website.

[ajax.systems/support/devices/motioncam-outdoor](https://ajax.systems/support/devices/motioncam-outdoor)

✉ [info@activealarms.es](mailto:info@activealarms.es)

☎ **+34 624 60 34 38**

🌐 [activealarms.es](https://activealarms.es)

**15m** Up to 15 m motion detection range

👁️ Night vision

🐾 Advanced pet immunity

🩹 Anti-masking system

🔋 Up to 3 years of operation from batteries

📶 Communication with the hub at a distance of up to 1,700 m

## Motion detected. Alarm raised. Evidence captured.


With MotionCam Outdoor, users know about the actual situation even before the burglars understand that they're busted. An animated series of photos made by a wide dynamic range camera follows the instant motion alarm for an accurate situation appraisal. Photos are transmitted via an encrypted proprietary radio protocol and displayed in the Ajax apps or third-party monitoring software.

📸 First photo delivered under 9 seconds

👁️ HDR camera for clear photos

📐 Photo resolution up to 640 × 352 pixels

👁️ IR backlight to make photos in the dark

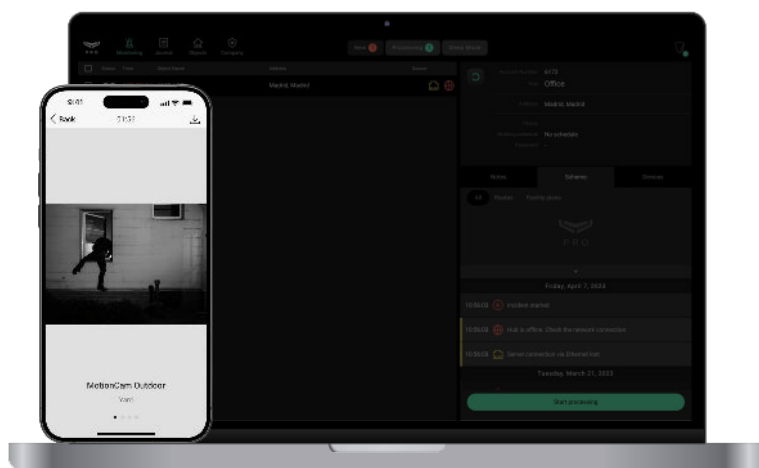

## Monitoring software with integrated Ajax photo verification

See the full list by the link: [ajax.systems/connecting-to-cms/](https://ajax.systems/connecting-to-cms/)



Horus



Manitou



SBN



Sentinel



WFR RINCSHER

WBB

## False alarm prevention

MotionCam Outdoor features a system of two independent PIR sensors that collect enough data to analyse the threat's reality with the LISA two-step software algorithm. LISA compares the frequency components of sensors signals – it is the know-how of the Ajax Systems that guarantee the detector accuracy.



Advanced pet immunity



Filtering sun glints and hot air streams

## Weatherproof design

MotionCam Outdoor is ready to operate in a wide range of climate zones. The detector is protected from dust and splashes and features a temperature compensation technology, making it effective in any weather conditions. The bundled hood protects masking sensors from rain and snow.



IP56 body




-25° to +60°C temperature range



Hood included

## Hassle-free installation

To add a detector to the system, an installer scans the QR code with the Ajax app and assigns a name and a room. Configuring is done in the app in real-time using detection zone and signal strength tests. The detector can be disabled or its system parameters can be reconfigured remotely.

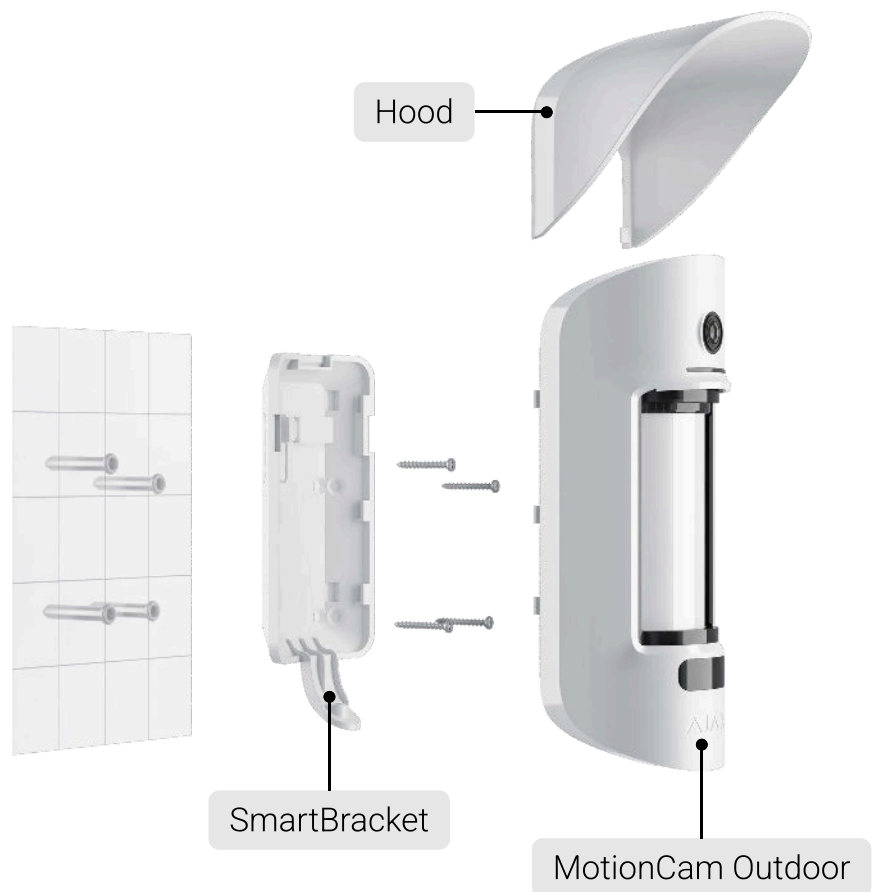

## Antisabotage protection

The anti-masking system calibrates automatically when mounting the device onto SmartBracket. Then, if an obstacle appears in the field of view of anti-masking sensors or if they are painted, the detector notifies users and a security company. A tamper is immediately activated when the detector is dismantled from the bracket. The system needs less than a minute<sup>1</sup> to identify communication loss with the detector.



Grade 2 anti-masking



Tampering alarm



Pings from 12 seconds



**Jeweller**

## Guaranteed alarm delivery

We've developed the Jeweller radio protocol to ensure the uninterrupted operation of all system devices. The radio protocol uses time frames to synchronize communication of connected devices, authentication to eliminate forgery, and encryption to protect against hacking.



**Wings**

## Secure photo transmission

We've developed Wings – an encrypted two-way radio protocol to securely deliver photos at a significant distance. It allows receiving visual alarm verification in a matter of seconds. Working in parallel with Jeweller, Wings does not interfere with it, providing stable data communication with a compatible hub at a distance of up to 1,700 meters.

## Tech Specs

<b>Compliance</b>  Grade 2 (EN 50131) PD 6662:2017 <sup>2</sup> UL369, ULC S306	<b>Radio communication range</b>  up to 1,700 m	<b>Body protection</b>  IP56	<b>Power supply</b>  4 × CR123A
<b>Frequency band</b>  866.0 – 866.5 MHz 868.0 – 868.6 MHz 868.7 – 869.2 MHz 905.0 – 926.5 MHz 915.85 – 926.5 MHz 921.0 – 922.0 MHz Depends on the region of sales	<b>Communication protocol</b>  <b>Jeweller:</b> two-way encrypted communication of event and alarms  <b>Wings:</b> two-way encrypted communication of photo verifications	<b>Photo camera</b>  Wide Dynamic Range up to 640 × 352 pixels resolution IR backlight	<b>Battery life</b>  up to 3 years
<b>Complete set</b>  MotionCam Outdoor SmartBracket mounting panel Hood 4 × CR123A (pre-installed) Installation kit Quick start guide	<b>Installation</b>  outdoor/indoor at a height 0.8–1.3 m	<b>Operation humidity</b>  up to 95%	<b>Operating temperature range</b>  from –25°C to +60°C
<b>Dimensions</b>  206 × 108 × 93 mm	<b>Weight</b>  470 g	<b>Color</b>  white	<b>Fixing</b>  SmartBracket

<sup>1</sup> depends on the hub-detector ping settings

<sup>2</sup> when installed indoors